


1. OPL machines

► products range

multifunction digital peristaltic pump **dynamik LR**

dynamik LR is a fixed speed peristaltic pump with digital adjustment of delay, dosing and lock-out time, designed to be used on single-tank laundry machines with max 12 Kg capacity.

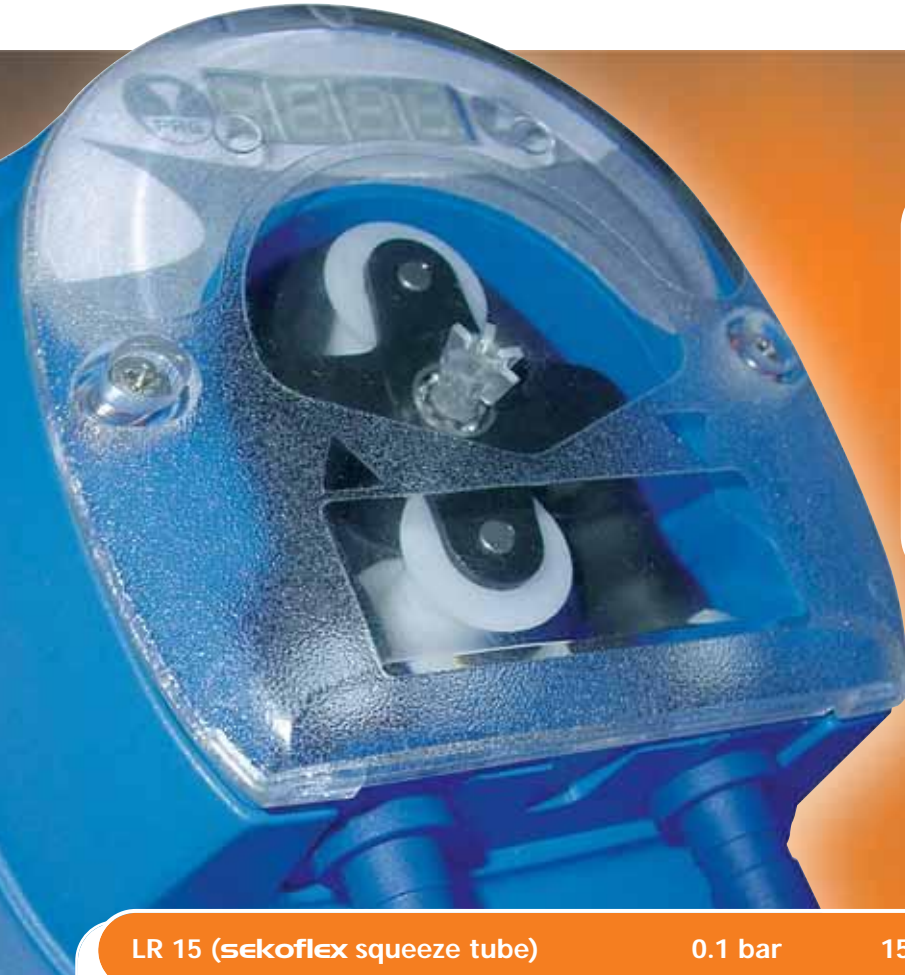

Precise
programming
of delay, dosing and lock
out times by **keys display**
and **microprocessor**
technology

Improved
lifetime

of squeeze tube and motor
thanks to the **Transaxle**
Technology and to new
technology tubing

LR 15 (sekoflex squeeze tube)

0.1 bar

15 lt/h

Power supply from 100 to 240 Vac 50-60 Hz (24 Vac 50-60 Hz upon request)

Power consumption 3.5 W • **Dosing time** from 0 to 999 s

Delay Time from 0 to 999 s • **Lock-out Time:** from 0 to 999 minutes

Easy to install

Thanks to convenient wall fixing brackets

Squeeze tube replacement

does not require pump starting, special tools or qualified personnel

IP 65 enclosure

Made of PP reinforced with glass fiber so that it is extremely water and dust proof.

seko's construction technology continues to provide products with high resistance to impacts and the chemical agents.

Electrical class 2

Making a ground cable connection unnecessary.

Materials

The entire range is made using fire-retardant materials according to the **RoHS** directive (Restriction of Hazardous Substances Directive).

Wide range of options

All pumps can be supplied with the possibility of connecting a level probe, acoustic alarm and priming by means of a switch



The Innovation for your dosing needs



Microprocessor technology

dynamik LR uses microprocessor technology for precise and reliable control over time



Easy and intuitive display

Luminous display for visualizing parameters consists of 4 digits, the first green and the others red. The green digit indicates the menu page and the 3 red digits indicate the value of the parameter being programmed




Transaxle Technology

Provides support and stability to the driveshaft, making the roller pressure on the squeeze tube more uniform. This results in a longer lifetime of the motor and the squeeze tube

sekoflex squeeze tube

Innovative material

- Guarantees high compatibility with chemical products
- Keeps the pump's flow rate constant even after many hours of operation

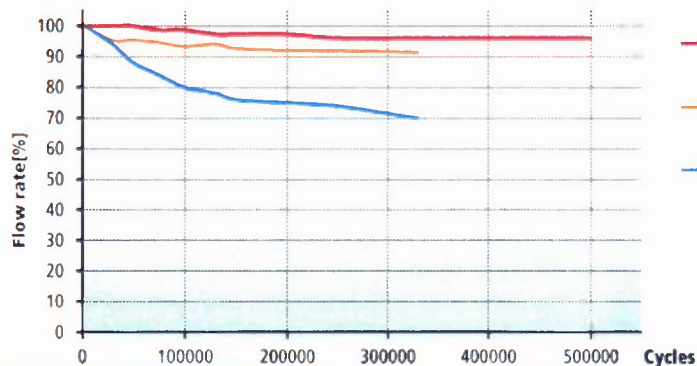

New construction technology

- **sekoflex** squeeze tube is made to ensure a constant ratio between the internal and external diameter along the entire length of the squeeze tube



- The squeeze tube is made using modern allow technologies that permits correct fiber positioning, to guarantee that the squeeze tube is very reliable, mechanically and chemically resistant

dynamik LR

Fixed speed peristaltic pump with digital adjustment of delay, dosing and lock-out time

Designed to be used on single-tank laundry machines with max 20 Kg capacity

Comes equipped with 2 cables:

- Cable 1: for the 90-265 Vac or 24 Vac power supply
- Cable 2 is dedicated to receiving a 20-265 Vac signal that activates the dosing cycle

Power supply from 90 to 265 Vac 50-60 Hz (24 Vac 50-60 Hz upon request)

Power consumption 3.5 W

Dosing time from 0 to 999 s • **Delay Time** from 0 to 999 s • **Lock-out Time:** from 0 to 999 minutes

LR 15 (sekoflex squeeze tube)

0.1 bar

15 lt/h