Electromagnetic dosing pumps for detergent or rinse-aid dosing



Invikta **Series**

Specially designed for the detergent market with specific performance (flow rate and pressure).

Its weight and small size make it a product that is especially easy to handle and install under any conditions.

External plastic enclosure in PP with IP65 protection degree protected against jets of water

and aggressive environments

90-265 VAC

power supply

(20-60 VAC upon request)

Wall mounting:

- · Directly on wall
- With fixing bracket



Pump can be equipped with

low level alarm connection

upon request



Detergent or rinse-aid dosing

InviktaD DETERGENT DOSING

Technical features

Maximum flow rate	5 l/h
Maximum pressure	2 bar
Valves and seals	EPDM
Protection degree	IP65
Flow rate adjustment	Manual from 0 to 100%
Power supply	from 90 to 265 VAC (Standard)


	Installation kit
	Wall mounting bracket
9	PP injection connector with non return valve
0	Suction tubing
0	Delivery tubing
	Foot filter
	No-tampering seal


InviktaR RINSE-AID DOSING

Technical features

Maximum flow rate	2 l/h
Pressione massima	7 bar
Valves and seals	FPM
Protection degree	IP65
Flow rate adjustment	Manual from 0 to 100%
Power supply	from 90 to 265 VAC (Standard)

	Installation kit
	Wall mounting bracket
0	Suction tubing
0	Delivery tubing
	Foot filter
	Stainless Steel non return valve
	Boiler non return valve adapter Ø 6-8 mm
	No-tampering seal

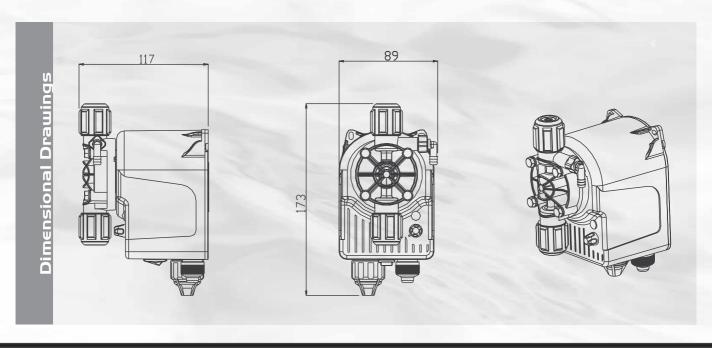

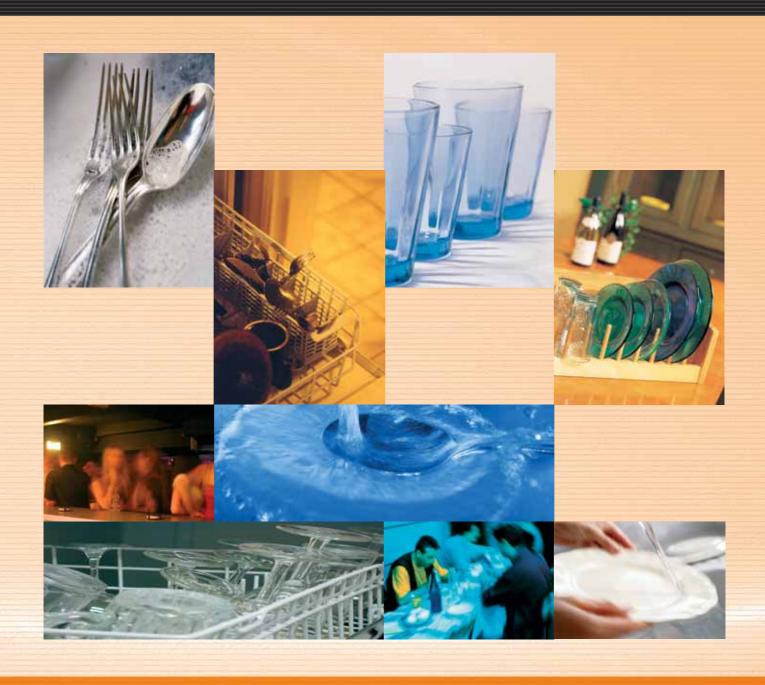





SEKO do Brasil BRAZIL • SEKO China CHINA • SEKO France FRANCE • SEKO Deutschland GERMANY • SEKO Italia ITALY OOO SEKO RUSSIA • SEKO Asia Pacific SINGAPORE SEKO Southern Africa SOUTH AFRICA • SEKO Iberica SPAIN SEKO UK UNITED KINGDOM • SEKO Dosing Systems USA